



Norphonic VoIP panel phone assembly Vik Call Panel

Assembling a Vik call panel with a Holme base produces a panel phone which can be used in a wide array of applications. The only requirements are for the panel to have a rectangular cut-out contour. Please refer to our manual for more assembly details.

The element uses high quality microphone and speaker, designed and tested for rugged environments. The speaker element assures clear and loud audio transmission.



Technical Specifications

Weather resistance: Dust and waterproof to IP65 (Dependent on mounting)

Heavy duty performance: Impact-proof, able to perform in challenging environment

Operating temperatures: -25° C to + 65° C Relative humidity high: 93% R.H at 40° C (non-condensing)

Casing material: Polycarbonate

Weight: 0.5kg (1.2kg in combination with Holme)


Microphone: Sensitive MEMS microphone with noise and echo cancellation.

Speaker: 15W

Colour: Traffic yellow or black, with black elements. Custom order colours are possible.

Connection: Terminal plugs for call button, speaker and microphone.

Dimensions

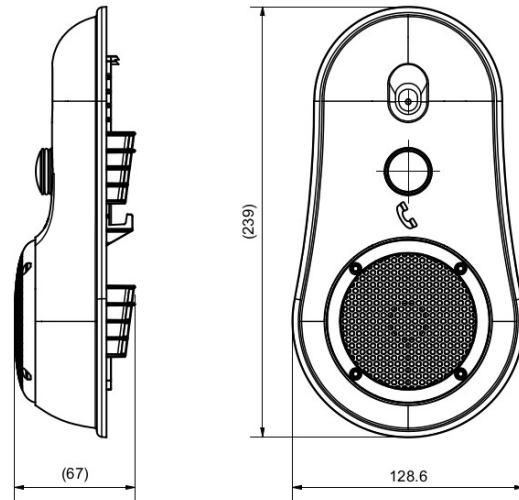

Approvals

EN 50121-4:2016A 1:2019 - Railway Applications

EN 55032:2015 AC:2016, EN 55035:2017 AC:2019 - Electromagnetic compatibility of multimedia equipment

EN 60529 - IP65 ingress protection

EN 62262:2002 - IK09 impact protection

Order Codes

Vik call panel assembly 1110013
(Web shop)

Learn more about our Innovations at
www.norphonic.com

Fjellsdalen 3, 5155 Bønes, Norway
+47 55 62 75 20
sales@norphonic.com

